



THIS DRAWING IS A CONTROLLED DOCUMENT. DRW NO MS600127

**NOTES:**

- 1 ALL DIMENSIONS ARE IN MILLIMETERS.
- 2 GLASS THICKNESS: 3.0±0.3.
- 3 TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. GLASS IS BEVELED UNDER TRANSDUCERS. HEIGHT OF TRANSDUCERS ABOVE GLASS: 1.5 MAXIMUM.
- 4 CABLE ROUTING ADDS A MAXIMUM OF 2.5 AS INDICATED ON THE SCREEN. CABLE IS ROUTED ALONG THE BEVEL.
- 5 BERG 65043-031, 2x6 HOUSING WITH BERG 48239-000 RECEPTACLES, DIRECTLY MATES WITH ANY OF THE FOLLOWING:  
 -INTELLITOUCH SERIAL CONTROL BOARD  
 -012226 CABLE (2x6 TO 8" DB9 BULKHEAD)
- 6 THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.
- 7 CABLE JACKET STRIPPED 152 FOR EASE DURING THE INTEGRATION PROCESS.

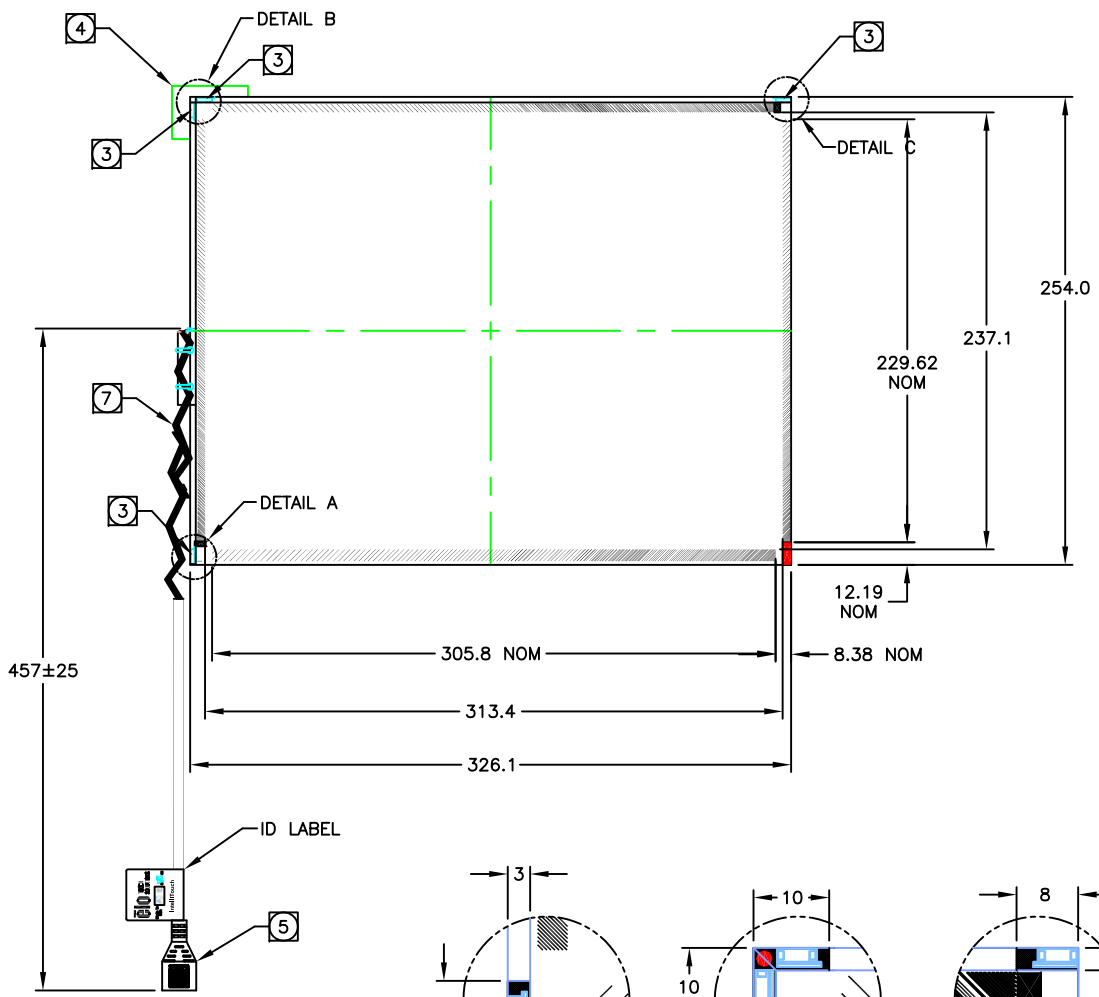

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE (+)	BLU	BLK
4	Y TRANSMIT (+)	BLU	GRY
5	Y RECEIVE (-)	BLK	BLK
6	Y TRANSMIT (-)	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT (-)	RED	RED
9	X RECEIVE (-)	RED	BLK
10	X TRANSMIT (+)	GRN	RED
11	X RECEIVE (+)	WHT	BLK
12	KEY		

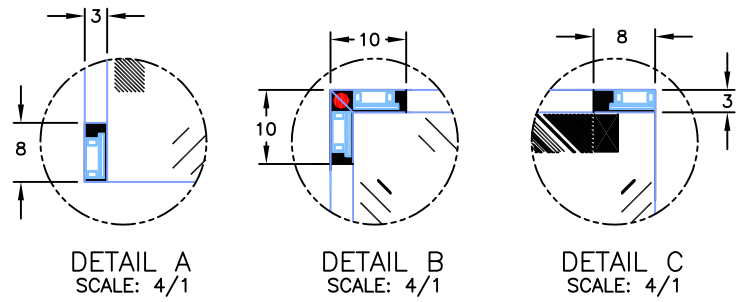

TOUCHSCREEN TABULATION	
PART NUMBER	SURFACE FINISH
E107313	CLEAR
E449313	ANTI GLARE

THIS DRAWING IS UNCONTROLLED AND REPRESENTS THE CURRENT STATE OF THE DESIGN. ANY CHANGES TO THE DESIGN SHALL BE INDICATED BY A REVISION RECORD. THIS DRAWING IS UNCONTROLLED AND REPRESENTS THE CURRENT STATE OF THE DESIGN. ANY CHANGES TO THE DESIGN SHALL BE INDICATED BY A REVISION RECORD.

LOC 08  
DIST 08

REV	DESCRIPTION	DATE	BY	CHKD
D	REVISED PER ECO-12-014540 ELO TITLE BLOCK WAS TE	10/01/12	BC	SS
C	ECO-12-015683: NEW ID LABEL 761019 VERT ORIENTATION; ADDED TD PLACEMENT	09/17/12	BC	LA
B	REVISED PER ECO-11-023549	01/09/12	DI	
P	LTR			

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± .8
	1 PLC ± .4
	2 PLC ± .2
	3 PLC ± -
	4 PLC ± -

DRN LEO A	11/25/05	MATERIAL INTELLITOUCH	HEAT TREAT
CHK			
APVD			
NAME DIMENSIONAL DRAWING, SCN-IT-FLT15.0-004-00X-B-R			
SCALE 1:1	SIZE A2	DRAWING NO MS600127	SHEET 1 OF 1