


Remark:

- 1.cable clip:straight cable clip;
- 2.substrate:emission terminal length:11.5mm;
- 3.stick way:stick wire on the panel side.

备注:

- 1.线卡:直线卡;
- 2.基板:发射:15.5mm,接收:11.5mm;
- 3.粘线方式:侧面.

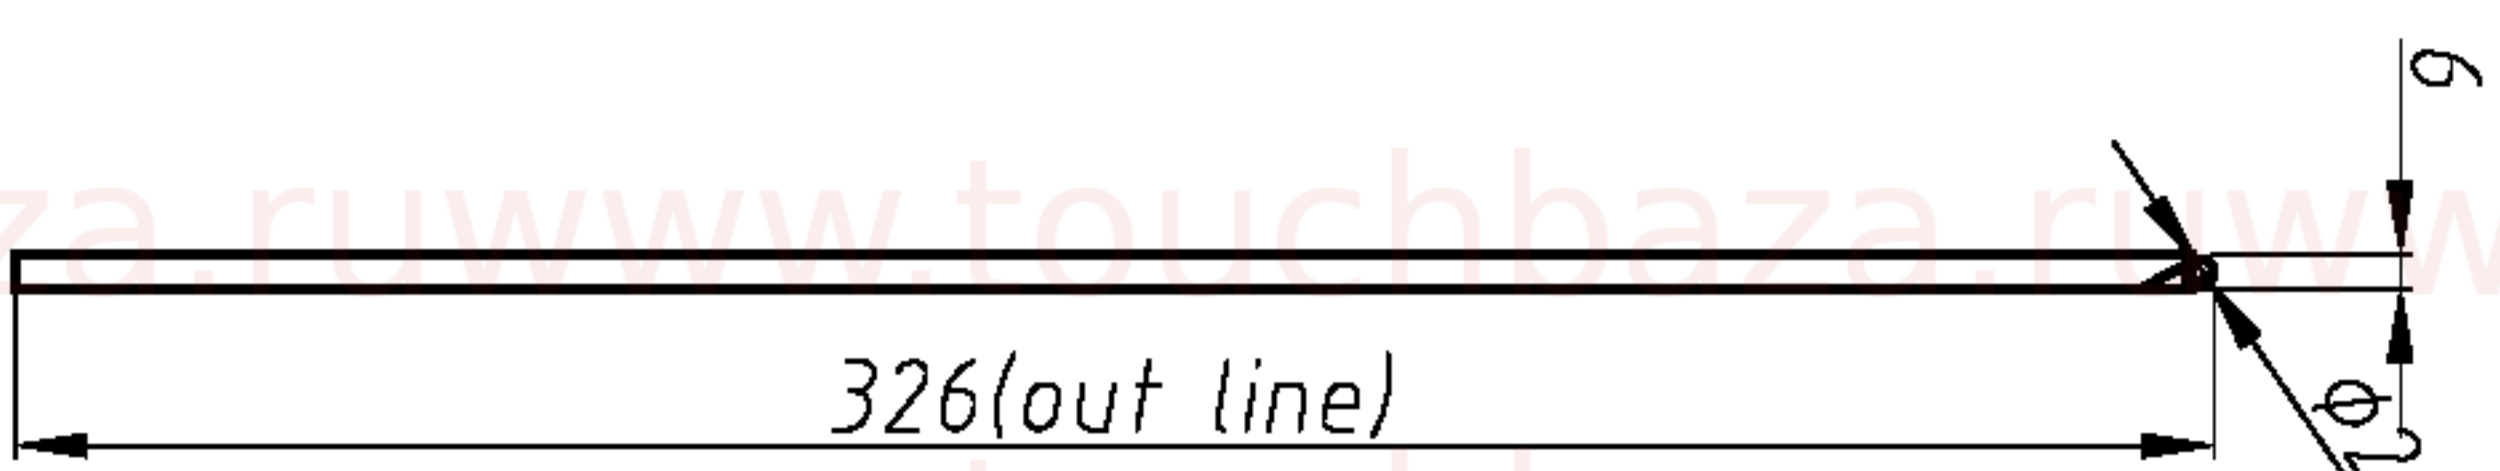

Edition	Modify	Date	Author
A1	旁线夹改为直线夹		

I Direction		Insulation Color
PIN	Signal	Overall Shield
1	Overall Shield	
2	Y + Receive	BLUE
3	Y + Receive	BLUE
4	Y Transmit	BLUE
5	Y - Receive	BLACK
6	Y Ground	YELLOW
7	Shield	
8	X Ground	GREEN
9	X+Receive	WHITE
10	X Transmit	RED
11	X-Receive	RED
12		

sensor 1	Y-Transmit
sensor 2	Y-Receive
sensor 3	X-Receive
sensor 4	X-Transmit

Unmarked Tolerance		Shen Zhen K&JAD Technology Co., Ltd.	
From	TO	Quality Level	Product
0	10	±0.1	DRA./Date
10	50	±0.2	CHK./Date
50	100	±0.3	APP./Date
100	Over	±0.5	

SAW TOUCHSCREEN

File NO. KT-PT-460/LF

Scale FREE

ED1. A1 Unit MM