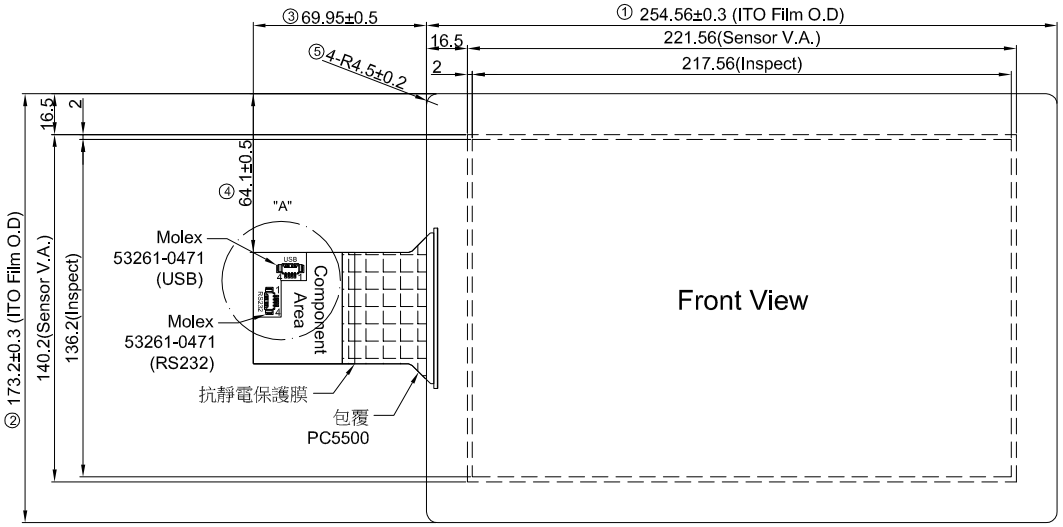

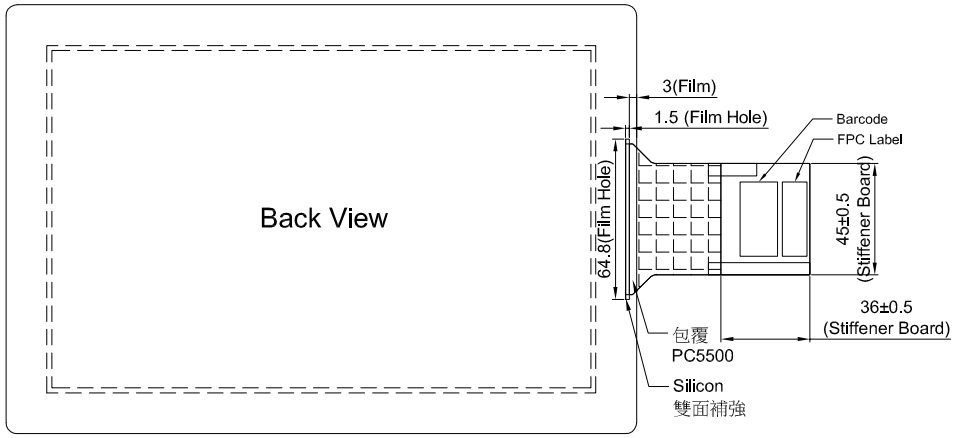

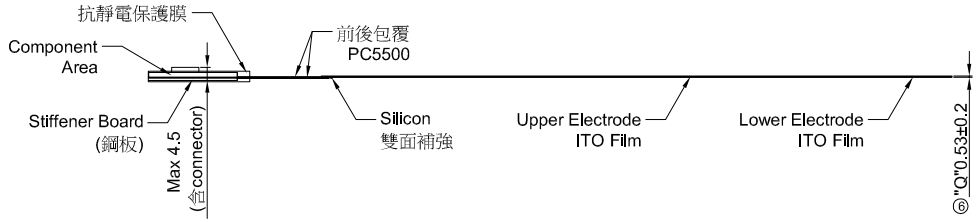





1. USB PIN ASSIGNMENT

1	VCC_5V
2	D-
3	D+
4	GND

2. RS232 PIN ASSIGNMENT

1	VCC_5V
2	RX
3	TX
4	GND

3. MATERIAL CHARACTERISTICS

Property	Requirement
Light transmission	87±2%
Operating temperature	-20~70° C
Storage temperature	-20~70° C
Operating Humidity	20~80%RH
Storage Humidity	30~80%RH

4.有標示"Q"之尺寸為重點量測尺寸

5.Tolerance no specified : ± 0.3mm

SYMBOL	DATE	REVISED DESCRIPTIONS
D01.1	2016.03.21	新發行

NOTE

CUSTOMER APPROVED

榮茂光學股份有限公司
MILDEX OPTICAL INC.

APPROVED	CHECK	DRAWN
林佳宏	蘇正維	黃曜晨

DWG-NO	M101H80-D01.1
SCALE	----
UNIT	mm
DATE	2016.03.21
SHEET NO.	1 / 1