

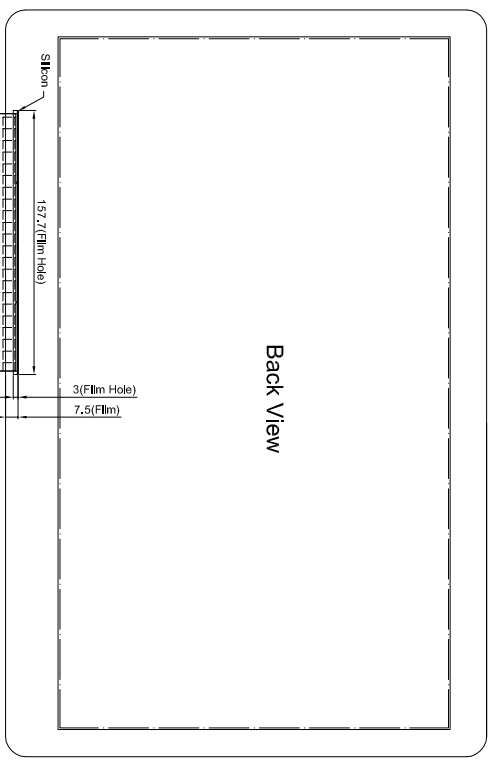
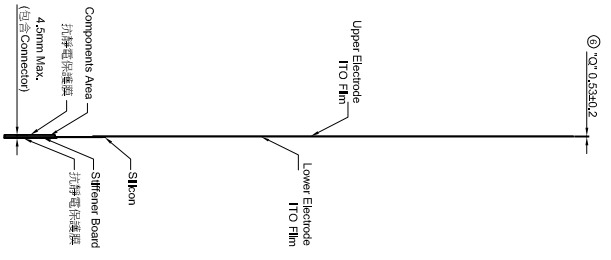


A	B	C	D
1	2	3	4
5	6	7	8
9	10	11	12
13	14	15	16

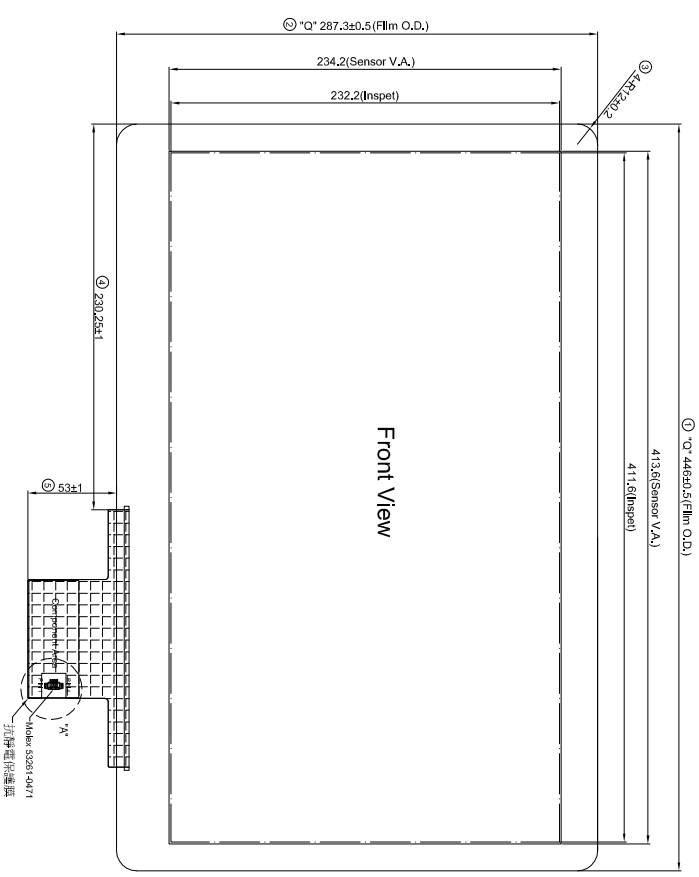

1	VCC- 5V
2	D-
3	D+
4	GND

1. TOUCH PANEL PIN ASSIGNMENT

2. MATERIAL CHARACTERISTICS

Property	Requirement
Light transmission	87±2%
Operating temperature	-20~70° C
Storage temperature	-20~70° C
Operating Humidity	20~80%RH
Storage Humidity	30~80%RH

- 3. Tolerance no specified: ± 0.5mm
- 4. 有標示"Q"之尺寸為重點量測尺寸

REVISED DESCRIPTIONS

NOTE

CUSTOMER APPROVED

MILDEX OPTICAL INC.

M189H22-D01.1



DATE 2015.10.21

SHEET NO. 1/1

APPROVED 林佳宏

CHECK 林珈伊

DRAWN 鄭金蓮

DATE 2015.10.21

SHEET NO. 1/1

新發行

2015.10.21

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16