




DESCRIPTION

DATE

NAME

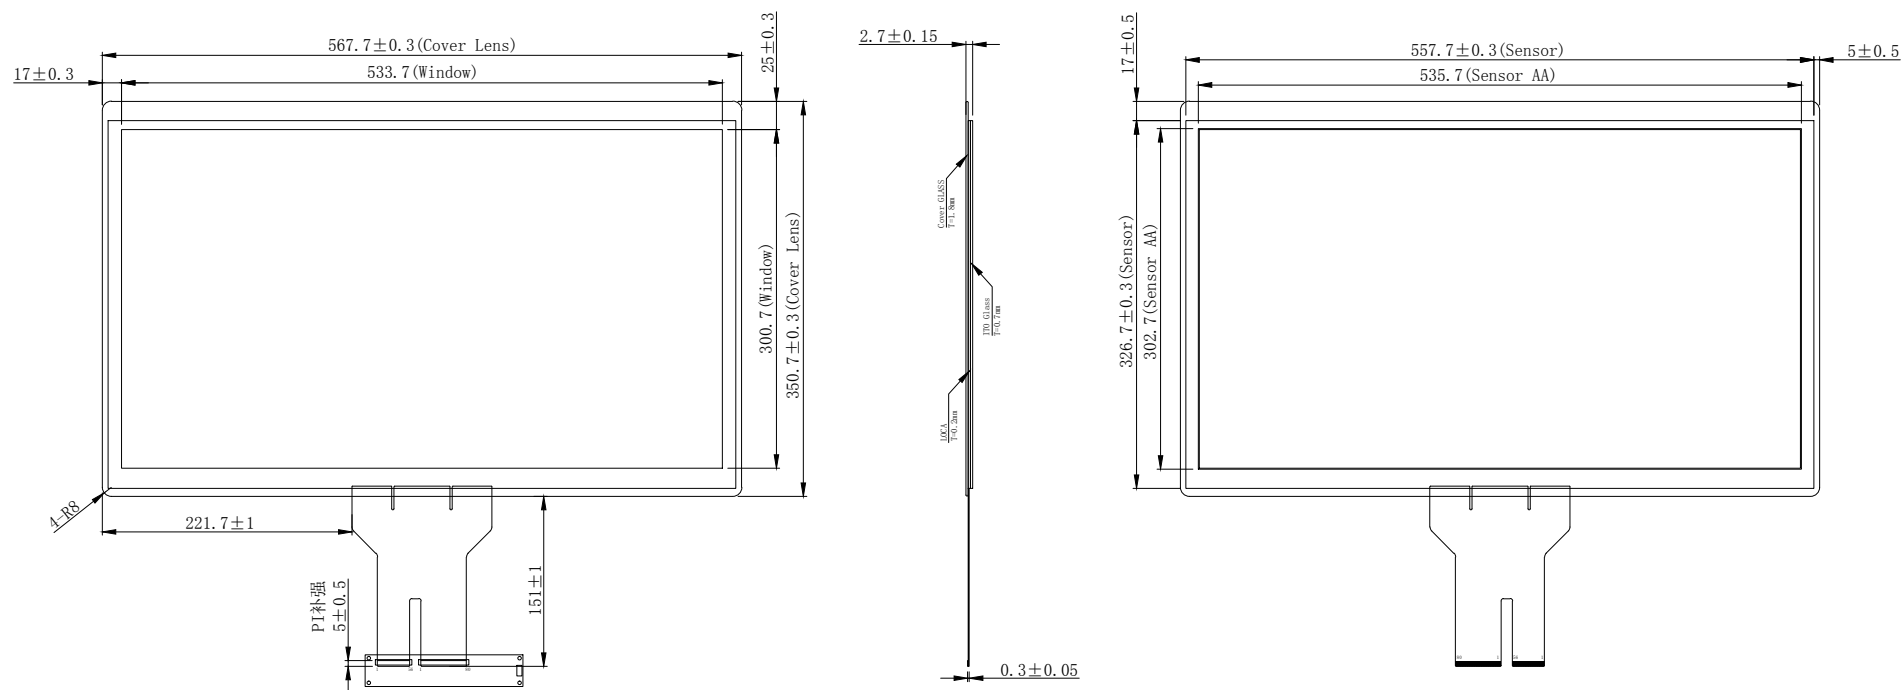


Technical parameters:

1. Cover Glass+LOCA+ITO Glass
2. IC:
3. Operating Humidity: 45~85 %RH
4. Light transmission: 85%
5. Surface Hardness: 6H
6. Operating temperature: -20°C~+70°C
7. Storage temperature: -30°C~+80°C
8. General tol±0.2mm

| 56pin | | 80pin | |
|----------|----------|------------|----------|
| pin1~10 | NC | | |
| pin11 | dummy | pin1 | dummy |
| pin12~55 | TX1~TX44 | pin2~pin79 | RX1~RX78 |
| pin56 | dummy | pin80 | dummy |

CRAS MT

3DR ANGLE
PROJECTION

504124

DWN:

YLH

UNIT

mm

CHK:

WMB

DATE

2014. 9. 5

APP:

LZH

CUSTOMER'S DATUM

24"