




DESCRIPTION

DATE

NAME

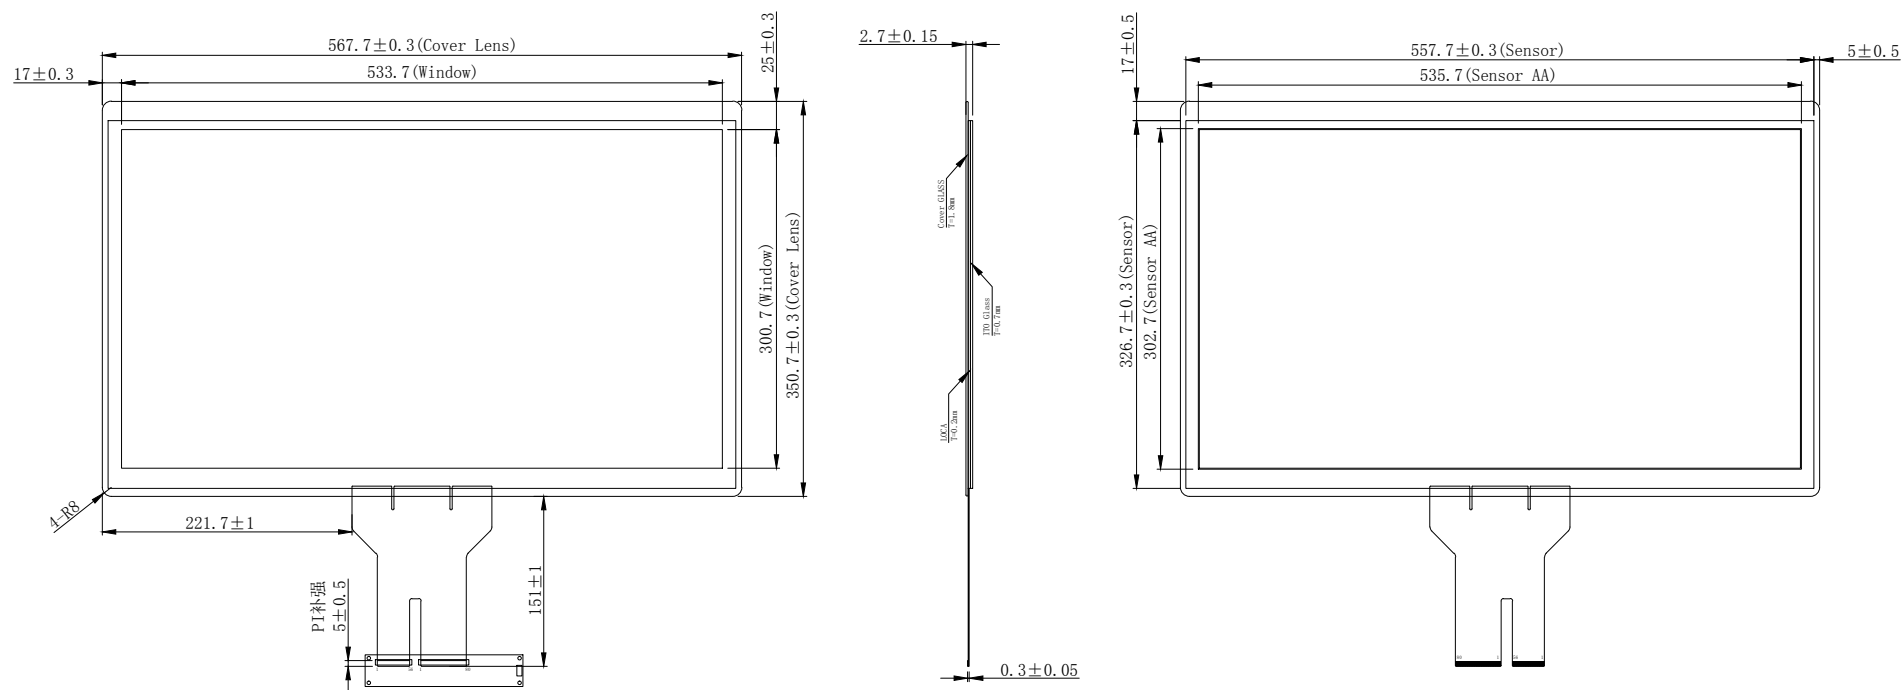


Technical parameters:

1. Cover Glass+LOCA+ITO Glass
2. IC:
3. Operating Humidity: 45~85 %RH
4. Light transmission: 85%
5. Surface Hardness: 6H
6. Operating temperature: -20°C ~+70°C
7. Storage temperature: -30°C ~+80°C
8. General tol±0.2mm

56pin		80pin	
pin1~10	NC		
pin11	dummy	pin1	dummy
pin12~55	TX1~TX44	pin2~pin79	RX1~RX78
pin56	dummy	pin80	dummy

CRAS MT

3DR ANGLE
PROJECTION

504124

DWN:

YLH

UNIT

mm

CHK:

WMB

DATE

2014. 9. 5

APP:

LZH

CUSTOMER'S DATUM

24"