
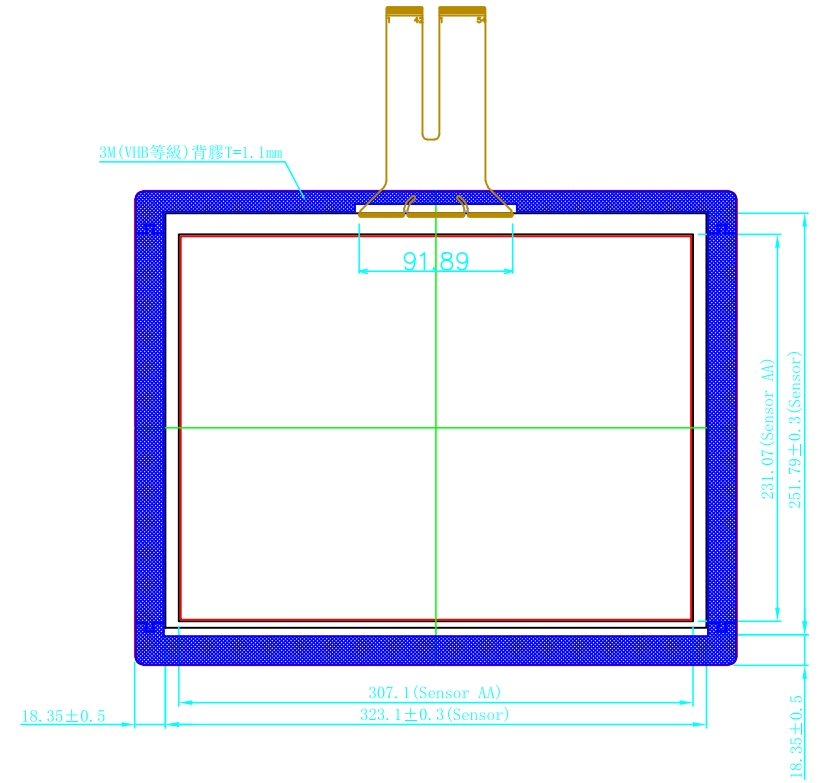
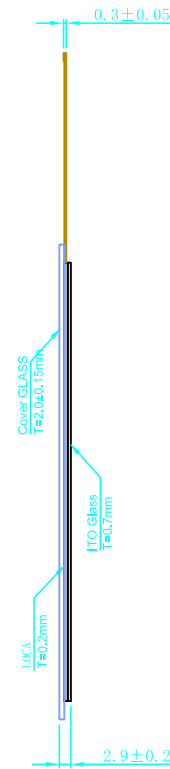


正视图

侧视图

标记(mark) <1>	修改内容(revised contents) 修改不影响走线情况下, sensor缩小4mm	签名(signature) 马剑星	日期(Date) 2018.9.1
-----------------	---	----------------------	----------------------

背视图

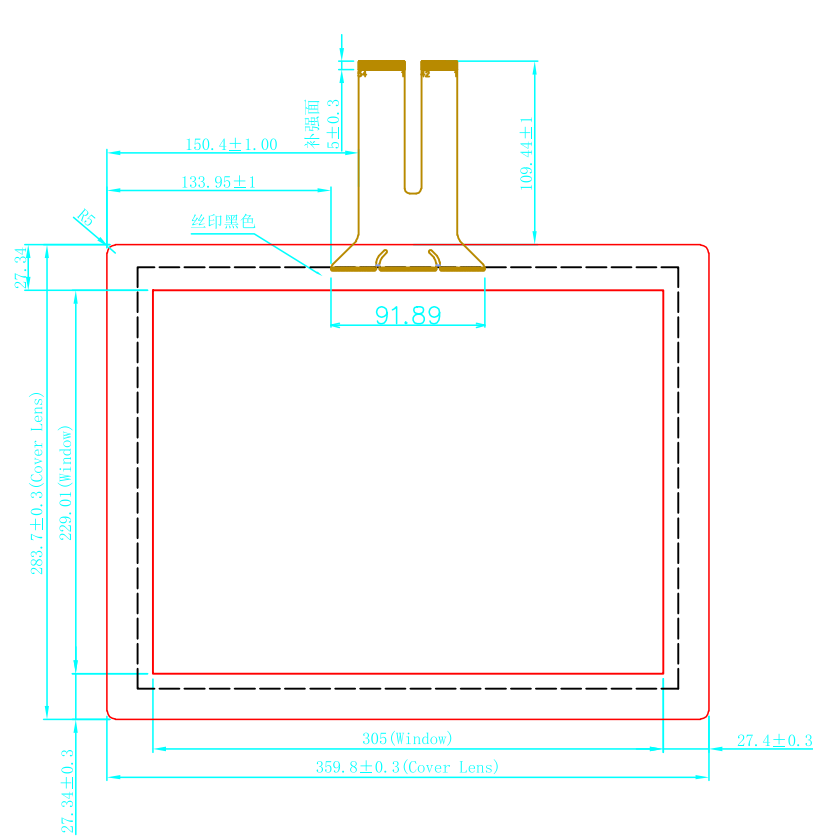

Technical parameters:

- Cover Glass+LOCA+ITO Glass
- IC: 需搭配EETI控制器
:EXC84H4254STBG/i1i2302c3p2v1
- Operating Humidity: 45~85 %RH
- Light transmission: 85%
- Surface Hardness: 6H
- Operating temperature: -20℃~+70℃
- Storage temperature: -30℃~+80℃
- General tol±0.2mm

SINOTELECTRONICS INC

TITLE: 产品编号	SNT-ITO-TPB-15-ILI			
Designed By: 设计	Customerid: 客户编号		View: 投影方式	
Checked By: 审核	Unit: 单位	mm	Scale: 比例	1:1
Approved By: 批准	Date: 日期			