



DATASHEET


ZYBRID[®] Series

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

ZYBRID®

The customisable touch sensor solution
for today's demanding applications

Our ZYBRID® touch sensors are based on our award winning embedded Projected Capacitive Technology (PCT™), and using the latest cold lamination process.

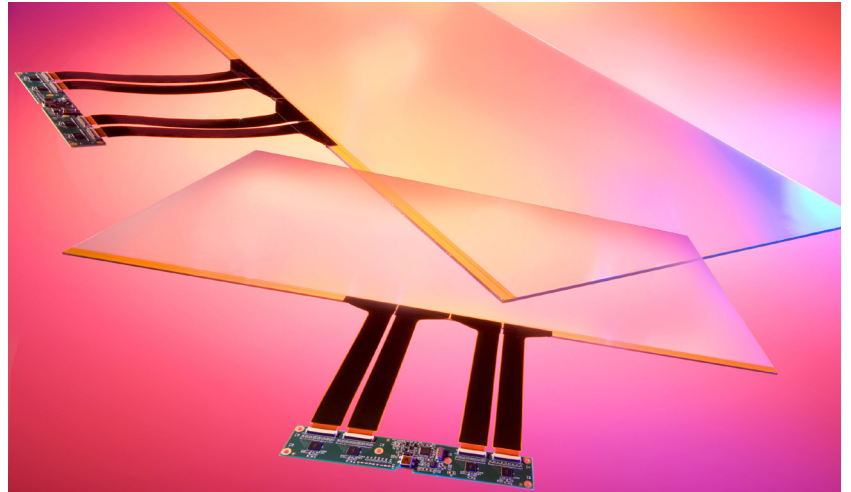

ADVANTAGES

- Highly durable, vandal and scratch resistant
- Fast and accurate response times
- Increased reliability and life expectancy
- Performance unaffected by moisture and surface contaminants
- Drift-free operation, one time calibration
- Operation with gloved and ungloved finger

FEATURES

- Chemically, physically and mechanically inert glass touch surface
- Ability to create a fully sealed design that complies with NEMA 4, 12 and IP 65 standards
- Size range from 5" - 82"
- Single and Dual touch performance when coupled with a ZXY100® controller
- Excellent light transmission with optional optical coating enhancements
- Compatible with a variety of operating systems including Linux
- Customisable options including, glass thickness and surface treatment, printed borders and customer logo's

OPERATION

The electronic controls effectively divide the screen into pixel-sized sensing cells, using an array of embedded microfine single track electrodes, which are not ITO based, and are near invisible to the human eye on the powered display. These tracks are connected to an electronic controller board, and an oscillation frequency is established for each track.

When a finger or conductive stylus approaches the surface of the sensor, a change in the oscillating frequency of the tracks around that particular point is registered; the position is then determined by the controller and firmware combination. Unlike conventional capacitive systems the active component of PCT™ is embedded behind the front substrate, ensuring protection, long life, and stability.

The unique sensing characteristics of PCT™ sensing eliminates the need for an operating force. Users are therefore not required to use credit cards, pens and other potentially damaging implements to activate the sensor.

APPLICATIONS

Zytronic's ZYBRID® touch sensors are a durable and cost effective method to meet today's demanding touch screen requirements. The construction is resistant to damage caused by moisture, heat and surface contaminants making ZYBRID® the perfect choice for digital signage, gaming and entertainment, vending machines and outdoor information stations.

INNOVATIONS

We are now pleased to announce our new Multi Touch ZYBRID® sensors capable of detecting at least 10 independent touches, whilst still offering the same great quality durable performance we're renowned for. View it in action at www.youtube.com/user/ZytronicTouchSensor

ZYBRID® Specification

SENSOR

Detection Method	Projected Capacitive Technology (PCT™) self capacitive type
Sensor	Glass with embedded micro-fine sensing array
Electronics	Remotely sited PCB, Serial or USB connectivity
Size range	5" - 82"
Optical Resolution	>4 lines/mm (NBS1963A)
Light Transmission	~90%
Haze	<3% (Gardner Haze) if Anti glare glass specified

CONTROLLER

See data sheet for ZXY100® touch controller

MECHANICAL

Immunity to damage	Glass surface with no moving parts
Sensor thickness	1 - 10mm
Stylus type	Finger, gloved hand and conductive stylus
Operation Force	<0.1g
Hardness	Glass hardness - Mohs 7
Sensor MTBF	Glass with no moving parts or coatings. No known wear out mechanisms
Sealability	Can be sealed to meet NEMA 4, 12 and IP 65 standards
Vibration	In accordance with IEC 60068-2-64 when installed in a suitable bezel
Options	Various glass types and thicknesses available; custom screen printed borders/ logos; flat or curved glass; drilled holes, slots and edge profiles, etc.

ENVIRONMENT

Operating Temperature	-35°C to +70°C
Humidity	RH 0-90% up to 40°C
Storage Temperature	-40°C to 80°C
Storage Humidity	RH 0-90% up to 40°C
Resistance to Contamination	Sensing media protected by glass, exceeds requirements of ASTM-F1598-96
Water Resistance	Unaffected by water droplets or condensation

QUALITY

See cosmetic specification www.zytronic.co.uk

APPROVALS

RoHS compliant
CE, FCC and UL approved www.zytronic.co.uk/support/quality-assurance





DATA DISPLAY GROUP

Our company network supports you worldwide with offices in Germany, Turkey, Great Britain and the USA. For more information please contact:



DISTEC GmbH

Distec GmbH

Augsburger Str. 2b
82110 Germering
Germany

Phone: +49 (0)89 / 89 43 63-0
Fax: +49 (0)89 / 89 43 63-131
E-Mail: info@distec.de
Internet: www.distec.de



DATA DISPLAY TEKNOLOJI

Data Display Teknoloji Elektronik San Ve Diş Tic A.Ş.

Kustepe Leylak Sok.
Nursanlar Is Merkezi
Kat. 6 No: 21
Sisli / Istanbul
Turkey

Phone: +90 (0)212 / 356 04 20
Fax: +90 (0)212 / 356 04 25
E-Mail: info@datadisplay.com.tr
Internet: www.datadisplay.com.tr



DISPLAY TECHNOLOGY

Display Technology Ltd.

A2 Spectrum Business Centre
Anthonys Way, Medway City Estate
Rochester, Kent, ME2 4NP
United Kingdom

Phone: + 44 (0)1634 / 29 55 55
Fax: + 44 (0)1634 / 29 55 43
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk



**Apollo
Display
Technologies**

A Data Display Company

Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1
Ronkonkoma, NY 11779
United States of America

Phone: +1 631 / 580-43 60
Fax: +1 631 / 580-43 70
E-Mail: info@apollodisplays.com
Internet: www.apollodisplays.com