



TOUCHSCREEN TABULATION		
PART NUMBER	SURFACE FINISH	
E393996	CLEAR	
E221757	ANTI-GLARE	

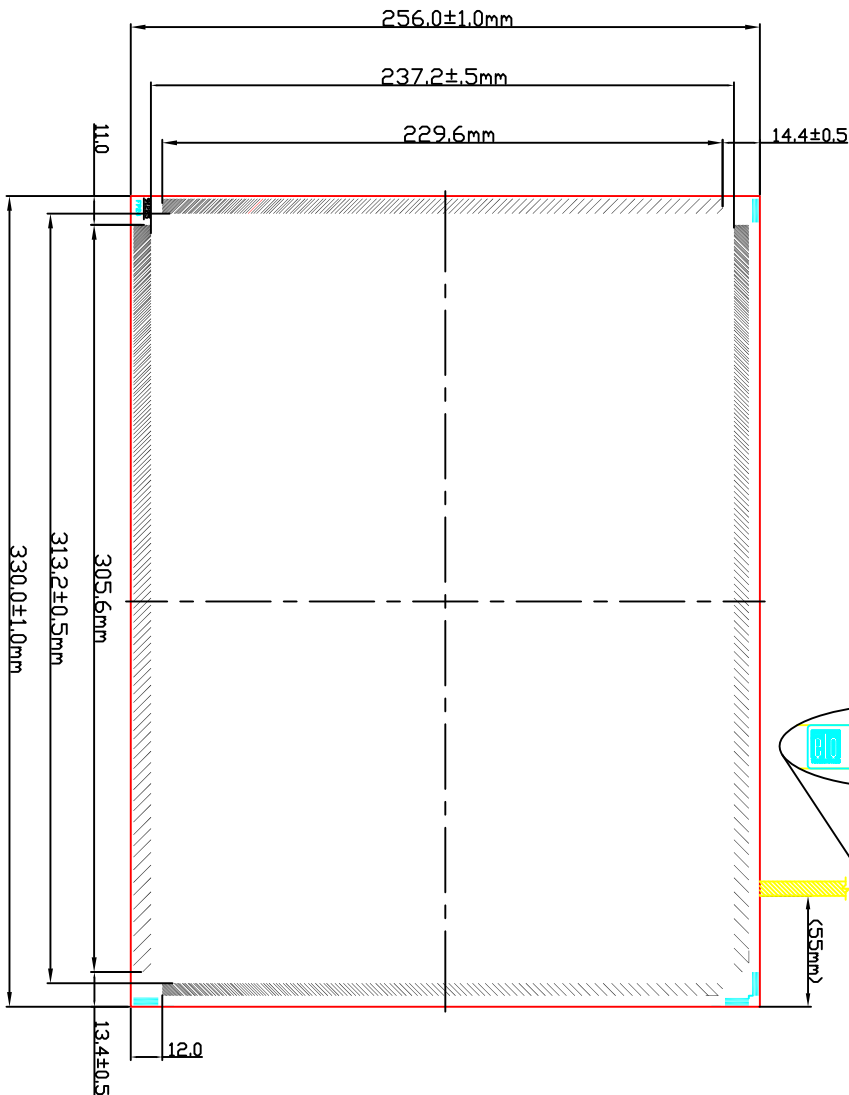

NOTES:

1. ALL DIMENSIONS ARE mm.
2. GLASS THICKNESS: 2.7mm NOMINAL.
3. WRAP-AROUND PIEZOS ARE LOCATED ON THE BACK SURFACE OF THE GLASS DIRECTLY OPPOSITE THE GRATING PATTERNS (HEIGHT ADDED: 1.6mm MAX).
4. FLEXIBLE PRINTED CIRCUIT (FPC) WIRES ARE ROUTED ON THE BOTTOM SURFACE OF THE GLASS DIRECTLY OPPOSITE THE RECEIVE ARRAY PATTERNS (X AND Y AXIS).
5. FLEXIBLE PRINTED CIRCUIT (FPC) WIRE DIRECTLY MATES WITH INTELLITOUCH CONTROLLERS. REFER TO WWW.ELOTOUCH.COM FOR CONTROLLERS AND ACCESSORIES PART NUMBERS.
6. THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.



line No.	signal assign
1	Y transmit --(GND)
2	Y transmit +
3	Y transmit --(GND)
4	Y receive +
5	Y receive -
6	X receive -
7	X receive +
8	X transmit --(GND)
9	X transmit +
10	X transmit --(GND)

LOC
08
DIST
08

G	REVISED PER ECO-15-1122, E393996	06/15/15	LA	COB
F	ECO-12-012424, REBAND TO ELO	06/15/12	BC	SS
E	REVISED PER ECO-07-014407	06/15/07	LA	COB
P	LM	REVISION RECORD	DATE	REV

DIMENSIONS	
mm	inches
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10

LEO	08/10/10	UNITS	SOA LINE	HEAT TREAT
ALV	08/14/15			CLR AND AG
LEO	08/15/15			
ELO				
DIMENSIONAL DRAWING				
SCN-IT-SPT15.0-00X-00Y-F-R				
SCALE	1:1	SIZE	A2	MS600020
SHEET	1	OF	1	G