


SECURETOUCH® TOUCHSCREEN
 SCN-ST-FLT19.0-003-000-B-R
 PART NUMBER: E480478

DWG NO E480478

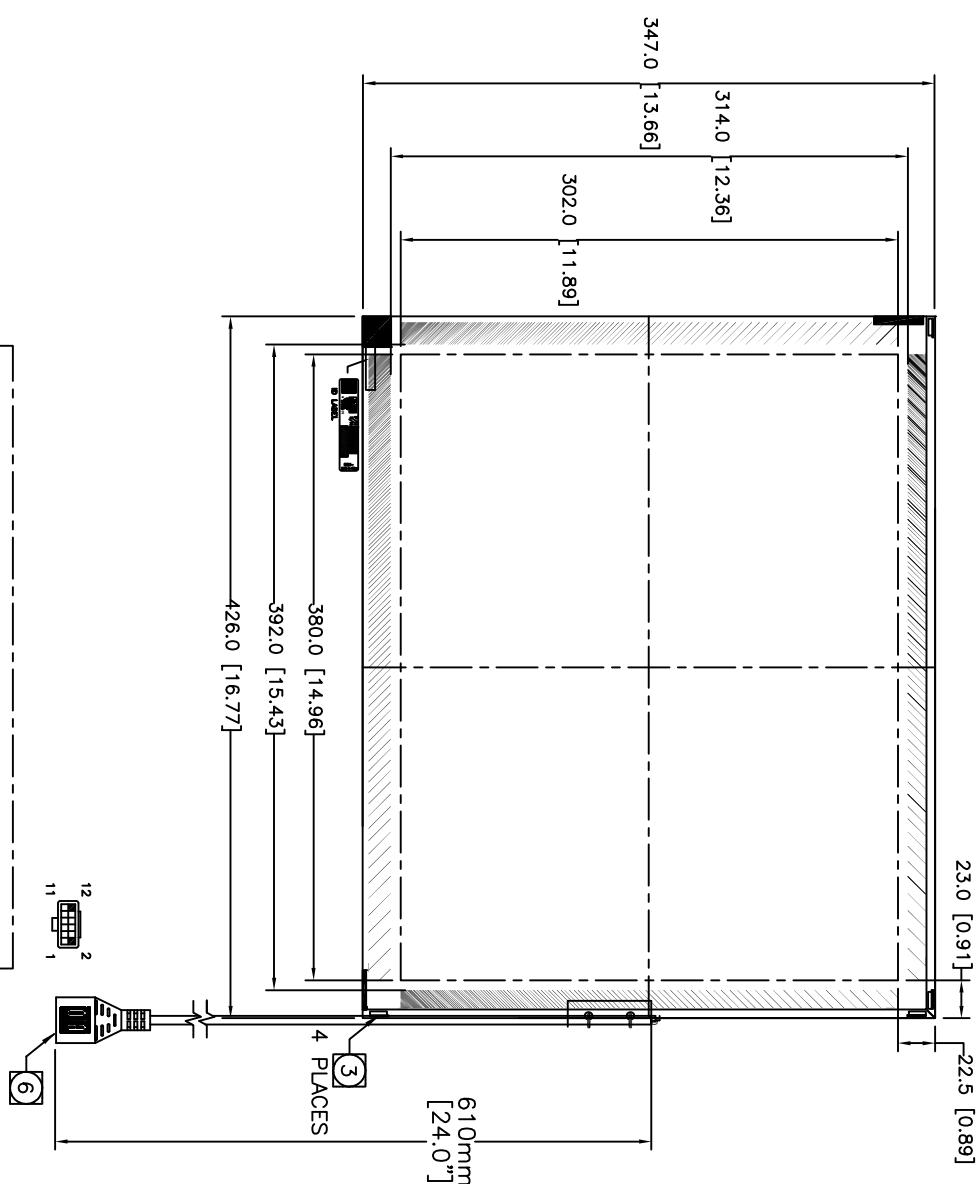

T/D HEIGHT ABOVE GLASS SURFACE: NONE

NOTES:


1. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
2. TOUGHENED GLASS THICKNESS: 5.7±0.3mm[0.224±.012]".
3. TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN.
4. NO MATERIAL EXTENDS MORE THAN 0.8mm[0.03"] BEYOND THE BACK SURFACE OF THE GLASS.
5. CABLE IS ROUTED ALONG THE BEVEL EDGES OF THE GLASS.
6. BERG 65043-031, 2x6 HOUSING WITH BERG 48239-000 RECEPTACLES, DIRECTLY MATES WITH ANY OF THE FOLLOWING:
 -INTELLITOUCH SERIAL CONTROL BOARD
 -012226 CABLE (2x6 TO 8" DB9 BULKHEAD)
7. THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.
8. SURFACE QUALITY SPECIFICATIONS: ELO'S ES500051

CONNECTION CHART

PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND		
2	KEY		
3	Y RECEIVE (+)	BLU	BLK
4	Y TRANSMIT (+)	BLU	GRY
5	Y RECEIVE (-)	BLK	BLK
6	Y TRANSMIT (-)	YEL	GRY
7	GROUND		
8	X TRANSMIT (-)	RED	RED
9	X RECEIVE (-)	RED	BLK
10	X TRANSMIT (+)	GRN	RED
11	X RECEIVE (+)	WHT	BLK

LOC	
DIST	

REV	DATE	BY	CHKD	DESCRIPTION
A	10/11/07	JR	LA	ISSUES
B	10/26/07	RD		REVISED PER EDO 07-02443
C				REVISED PER EDO 07-024041



DATE	07/21/07	APPROVED	MARKETING
BY	RONLEY	DATE	07/21/07
BY	LEO ALEXANDRO	DATE	07/21/07
SCALE	1:1	MARKETING DRAWING	
SHEET	1		
OF	1		
REV	B		

AMP 3307-7 REV 2/10/00 8 7 6 5 4 3 2 1